

## I - 18


A subwoofer that comes with the series-I, uses a FaitalPro Neodymium 18HP 1010 driver that reproduces the ultra-low range. The large size of the Subwoofer will give powerful sound quality.

The product I - 18 is designed in a square block to help the speaker have a wide ground surface for anti-vibration during its operation, minimize vibration to avoid affecting the sound quality when the speaker is amplified.

The large connection port also helps the speaker to effectively reduce air noise.

The sound quality of the speaker is “clean” and powerful, with international standard sound.



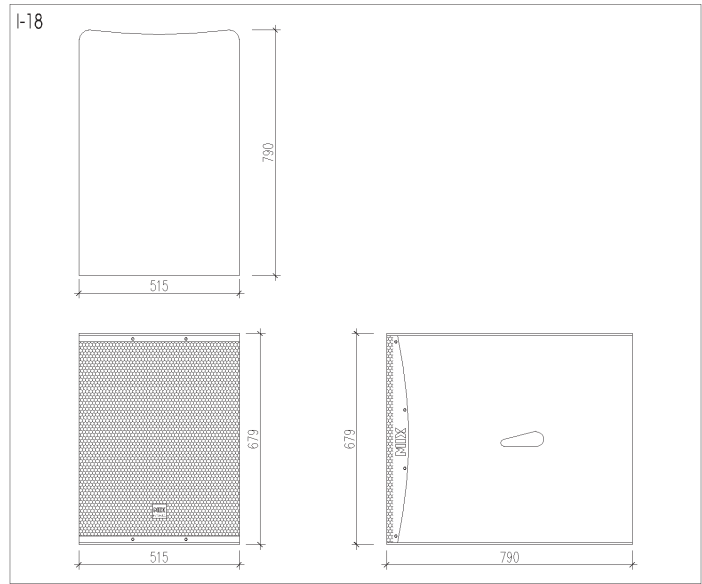

## SPECIFICATIONS

TYPE	Compact, direct radiating subwoofer
FREQUENCY RESPONSE	35Hz-150Hz $\pm$ 6dB, -10dB @ 38Hz
DRIVER	18" (460mm)/4" (100mm) voice coil, long excursion, ferrite magnet
RATED POWER	1000W AES, 2000W peak
SENSITIVITY	101dB
MAXIMUM SPL	131dB continuous, 137dB peak (half space)
NOMINAL IMPEDANCE	8 $\Omega$
CROSSOVER	
ENCLOSURE	Multi-angle birch/poplar ply
FINISH	Black textured paint
PROTECTIVE GRILLE	Black perforated steel with scrim cloth backing
CONNECTORS	2 x NL4 type
PIN CONNECTIONS (INPUT)	1+/-
PIN CONNECTIONS (LINK)	1+/- to 1+/-
DIMENSIONS	(W)515mm x (H) 679mm x (D) 790mm
WEIGHT	
ACCESSORIES	Wall bracket, eyebolts