

X - 12K


As a versatile speaker line with very high applicability, suitable for many purposes such as KTV rooms, mini Bar, movie room, etc..

X - 12K uses HF Faital driver with high sensitivity and high impedance, large weight that will stabilize vibrations, reduce distortion and especially improve bass sound quality.

As one of the leading speaker lines in coating technology. Plastic coating is a high-end technology used to ensure absolute color fastness, scratch resistance and water resistance usually only found in professional speakers for outdoor performance.

X - 12K uses imported crossovers with 100% components of famous brands such as: Faco, Jantzen, Dale, Royal etc.



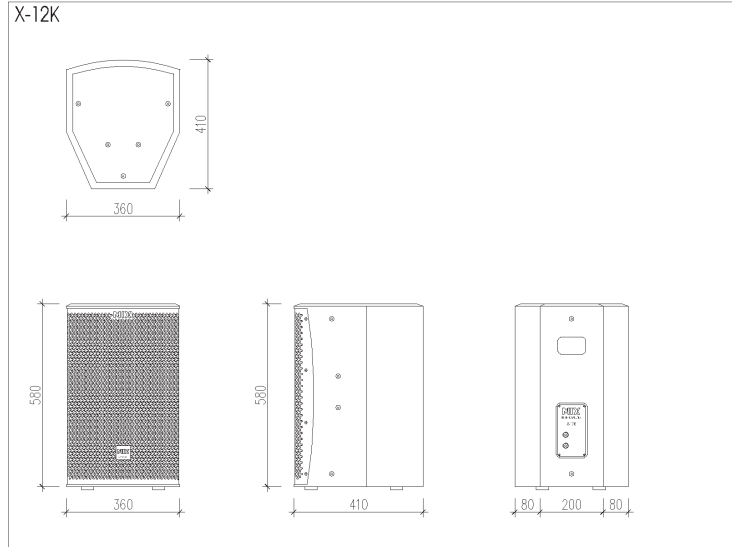

SPECIFICATIONS

TYPE	Compact, passive two-way system
FREQUENCY RESPONSE	65Hz-20kHz \pm 10dB, -12dB @ 50Hz
DRIVER	LF: 12" (300mm)/3" (75mm) voice coil, ferrite motor system HF: 1" (25mm) exit/1" (25mm) voice coil, polyimide dome compression driver
RATED POWER	400W AES, 800W peak
SENSITIVITY	96dB
MAXIMUM SPL	123dB continuous, 129dB peak
NOMINAL IMPEDANCE	8 Ω
CROSSOVER	2.3kHz passive
ENCLOSURE	Multi-angle birch/poplar ply
FINISH	Black textured paint
PROTECTIVE GRILLE	Black perforated steel with scrim cloth backing
CONNECTORS	2 x NL4 type
PIN CONNECTIONS (INPUT)	1+/1-
PIN CONNECTIONS (LINK)	1+/- to 1+/-
DIMENSIONS	(W) 360mm x (H) 580mm x (D) 410mm
WEIGHT	23kg
ACCESSORIES	Wall bracket, eyebolts